Product Characteristics AquaLOCK®

Swing Door Sectional Door Basement Doors Side Doors Flap Windows Protector Portals 4-sided Quickwall (new)

- Patented and certified sealing mechanism in all AquaLOCK® system products.
- Each product is custom-made thus, accomodate individual preferences both visually and structurally.
- Additional certification by external testing bodies assures flood resistance according to the ift guideline FE-07/1-2005.
- Quick assembly = protection possible within a day.
- · Special designs available upon request.
- High burglary protection up to RC3 made possible for doors.

TBS - AqualOCK® - Quality and innovation at a fair price

For over 35 years, our company at Torbau Schwaben (TBS) in Oberessendorf, have mastered the art of combining craftsmanship, technology and innovation. In the meantime, we have developed from a regional business to one of the leading companies in the door and gate industry throughout Europe. Our outstanding team of more than 85 employees, regularly set new standards in the field of flood protection technology and all our products are made in Germany. Discover the quality and reliability of TBS - your expert for innovative heavy rain and flood protection solutions.

Call now: 07355/9310-0 or email to info@torbau-schwaben.de www.aqualock.info

Your TBS-Technical consultant:






TORBAU SCHWABEN Enzianstraße 14 D-88436 Oberessendorf Telefon: 07355/9310-0

AquaLOCK®

Flood-protection Products

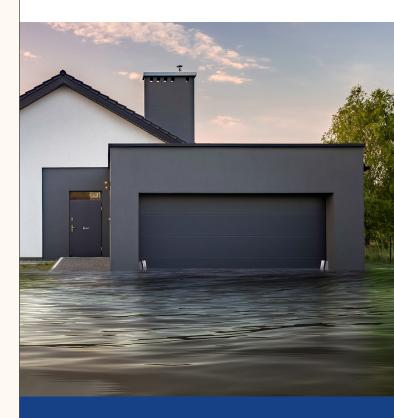

The complete product range for comprehensive protection against floods and heavy rain

AquaLOCK® Swing Gate



- Available in stainless steel, galvanized steel and painted in your desired color
- Max. flood protection height: 1.6 m (with garage door height = 2.6 m)

AquaLOCK® Sectional door



- Max. flood protection height: 0.5 m
- · Sealing system also available painted in gate color

AquaLOCK® Flap



- Ideal for wall openings
- Sealing system works on four sides
- Max. flood protection height: 2.3 m

AquaLOCK® Windows Protector




- Retrofittable acrylic partition with ventilation function for (basement windows
- Max. flood protection height: 2.5 m

AquaLOCK® Quickwall



- Mobile flood protection for all types of building openings
- Max. flood protection height: 1.6 m

AquaLOCK® Entrance or side door



- Choice of 4 locking variants with different flood protection heights
- Max. flood protection height: 5 m
- Certified thermal protection value of U_d 1.5 W/m²K

AquaLOCK® Portal and courtyard gate





- Manual gate opening inwards or outwards
- Manually easy to use friction latch locking system
- Max. flood protection height: 1.2 m
- Also available with decorative elements to match the existing fence